

ELITE PRO RT Series


ELITE PRO 5000/6000ELCDRTX5U

Powered by **CyberPower**

Extended Power Protection for Mission-Criticals

The ELITE PRO RT Series UPS provides advanced level of power protection to servers, telecom equipment, VOIP, internet working hardware and other mission-critical applications. Featuring Pure Sine Wave output and Automatic Voltage Regulation (AVR) stabilizes the AC signal and maintains a safe voltage, it allows the UPS to maintain safe power levels for the connected equipment without resorting to battery power. With the add-on advantage of Extended Runtime (XL) battery packs, the UPS backup time can be extended to maximize workflow flexibility. The placement-wise design could be configured in either Tower (T) or Rackmount (RM) form with the attached stands and skids to make the most of your workspace.

The optional SNMP/HTTP Remote Management Capability enables remote management and control of the system through standard web browser. Together with the included PowerPanel® Business Edition management software, it could provide corporate servers and critical workstations comprehensive network power management including unattended-shutdown, event logging, reporting, and notifications.



Applications

- Home and Home Office
- Home Theater System
- Small Office
- Medium Business
- Corporate Data Center
- Networking, Servers & Workstations
- Industrial Equipment

Series Features

- GreenPower UPS™ Technology
- Pure Sine Wave Output
- Line-Interactive UPS Topology
- Rack/Tower Convertible Configurations
- Automatic Voltage Regulator (AVR)
- EMI, RFI, Surge and Spike Protection
- Critical Load Outlets
- Phone/Fax/Modem/DSL/Network Protection
- Auto-Restart/Auto-Charge
- Emergency Power Off (EPO) Port
- Protected On/Off Switch
- Multifunction LCD Readout
- Rotatable LCD Indicator
- USB & Serial Connectivity Ports
- Extended Runtime (XL) Models
- Hot-Swappable Battery Packs
- User-Replaceable Batteries
- SNMP/HTTP Remote Management Capability (Optional)
- PowerPanel® Business Edition Software

EPO Port

Pure Sine Wave


XL Model

SNMP /HTTP

LCD Display

RM/T Form

OUTPUT WAVEFORM - PURE SINE WAVE



For applications which require the highest level of line clarity for proper function, the Smart App UPS Systems are the perfect choices with its quality Pure Sine Wave output. They are designed for electronic devices that have *Power Factor Correction (PFC)* Power Supplies as well as for small AC motors and other devices that need true sine-wave power in order to function properly.

POWERPANEL® BUSINESS EDITION S/W



Auto-shutdown Software


PowerPanel® Business Edition Management Software, is compatible with Windows8, 7, Vista, XP, 2000, Windows Server 2012, 2008, 2003, VMware Esxi, Citrix XenServer, Linux and Mac.

**Software functions may vary due to firmware version and/or hardware constraints.*

ELITE PRO RT Series

ELITE PRO 5000/6000ELCDRTX5U


Powered by **CyberPower**




Technical Specification

Model	ELITE PRO 5000ELCDRTX5U	ELITE PRO 6000ELCDRTX5U
Configuration		
Capacity (VA / Watts)	5000 / 4000	6000 / 4500
Energy-Saving Technology	Yes	
Input		
Frequency Range	47 Hz - 63 Hz (Auto Sensing)	
Input Plug Type	Hard Wire 3-wire	
Output		
UPS Outlets (Numbers)	(8) IEC 320 C13, (2) IEC 320 C19, (1) Hard Wire 3-wire	
On Battery Output Voltage	Pure Sinewave at 230 Vac +/- 5%	
On Battery Output Frequency	50 Hz / 60 Hz +/- 0.1 Hz	
Typical Transfer Time	4ms	
Overload Protection	Circuit Breaker / Internal Circuitry Limiting	
AVR	Buck / Boost / Double Boost	
Surge Protection and Filtering		
Surge Protection	Yes	
DSL / Phone / FAX / Modem Protection	RJ11/RJ45 (One In / One Out)	
Physical		
Dimensions (H x W x D) (mm)	220 x 433 x 645	
Weight (kg)	101.5	103.5
Battery		
Sealed Maintenance Free Lead Acid Battery	12V / 9AH x 16	
User Replaceable	Yes	
Typical Recharge Time	4 Hours	
Runtimes		
Half-load / Full-load (mins)	31 / 12	28 / 10
Status Indicators		
Indicators	Power On, Using Battery, AVR, Load Level, Battery Level	
Audible Alarms	On Battery, Low Battery, Overload	
Multi-function LCD Readout	Yes	
Communication		
PowerPanel® Business Edition	Windows 8 / 7 / Vista / XP / 2000, Server 2012 / 2008 / 2003, Linux, VMware Esxi, and Citrix XenServer	
Management		
Self Test	Yes	
Auto-Charge / Auto-Restart	Yes	
Connectivity Ports	USB, Serial port (RS232)	
SNMP/HTTP Capable	Yes	

#All specifications are subject to change without notice. ©2013 NITRAM S.A. All Trademarks are the property of their owners.

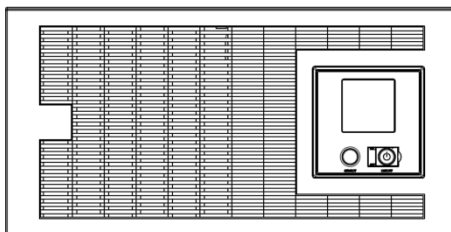

Front

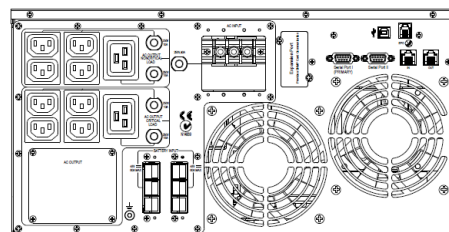

Back

