


# ELITE PRO RT Series

## ELITE PRO 1000/1500/2000ELCDRTL2U

Powered by **CyberPower**

## Extended Power Protection for Mission-Criticals



The ELITE PRO RT Series UPS provides advanced level of power protection to servers, telecom equipment, VOIP, internet working hardware and other mission-critical applications. Featuring Pure Sine Wave output and Automatic Voltage Regulation (AVR) stabilizes the AC signal and maintains a safe voltage, it allows the UPS to maintain safe power levels for the connected equipment without resorting to battery power. With the add-on advantage of Extended Runtime (XL) battery packs, the UPS backup time can be extended to maximize workflow flexibility. The placement-wise design could be configured in either Tower (T) or Rackmount (RM) form with the attached stands and skids to make the most of your workspace.

The optional SNMP/HTTP Remote Management Capability enables remote management and control of the system through standard web browser. Together with the included PowerPanel® Business Edition management software, it could provide corporate servers and critical workstations comprehensive network power management including unattended-shutdown, event logging, reporting, and notifications.

### Applications

- Home and Home Office
- Home Theater System
- Small Office
- Medium Business
- Corporate Data Center
- Networking, Servers & Workstations
- Industrial Equipment

Energy-Saving

Pure Sine Wave

EPO Port

SNMP /HTTP


XL Model

RM/T Form

### Series Features

- GreenPower UPS™ Technology
- Pure Sine Wave Output
- Line-Interactive UPS Topology
- Rack/Tower Convertible Configurations
- Automatic Voltage Regulator (AVR)
- EMI, RFI, Surge and Spike Protection
- Critical Load Outlets
- Phone/Fax/Modem/DSL/Network Protection
- Auto-Restart/Auto-Charge
- Emergency Power Off (EPO) Port
- Protected On/Off Switch
- Multifunction LCD Readout
- Rotatable LCD Indicator
- Extended Runtime (XL) Models
- USB & Serial Connectivity Ports
- Hot-Swappable Battery Packs
- User-Replaceable Batteries
- SNMP/HTTP Remote Management Capability (Optional)
- PowerPanel® Business Edition Software

### OUTPUT WAVEFORM - PURE SINE WAVE



For applications which require the highest level of line clarity for proper function, the Smart App UPS Systems are the perfect choices with its quality Pure Sine Wave output. They are designed for electronic devices that have *Power Factor Correction* (PFC) Power Supplies as well as for small AC motors and other devices that need true sine-wave power in order to function properly.

### POWERPANEL® BUSINESS EDITION S/W



#### Auto-shutdown Software


PowerPanel® Business Edition Management Software, is compatible with Windows8, 7, Vista, XP, 2000, Windows Server 2012, 2008, 2003, VMware Esxi, Citrix XenServer, Linux and Mac.

*\*Software functions may vary due to firmware version and/or hardware constraints.*

# ELITE PRO RT Series

## ELITE PRO 1000/1500/2000ELCDRTXL2U


Powered by **CyberPower**




### Technical Specification

Model	ELITE PRO 1000ELCDRTXL2U	ELITE PRO 1500ELCDRTXL2U	ELITE PRO 2200ELCDRTXL2U
<b>Configuration</b>			
Capacity (VA / Watts)	1000 / 750	1500 / 1125	2200 / 1650
Energy-Saving Technology	Yes		
<b>Input</b>			
Frequency Range	47 Hz - 63 Hz (Auto Sensing)		
Input Plug Type	IEC 320 C14		IEC 320 C20
<b>Output</b>			
UPS Outlets (Numbers)	(10) IEC320 C13		(1) IEC320 C19 (9) IEC320 C13
On Battery Output Voltage	Pure Sinewave at 230 Vac +/- 5%		
On Battery Output Frequency	50 Hz / 60 Hz +/- 0.1 Hz		
Typical Transfer Time	4ms		
Overload Protection	Circuit Breaker / Internal Circuitry Limiting		
AVR	Buck / Boost / Double Boost		
<b>Surge Protection and Filtering</b>			
Surge Protection	Yes		
DSL / Phone / FAX / Modem Protection	RJ11 / RJ45 (One In / One Out)		
<b>Physical</b>			
Dimensions (H x W x D) (mm)	88 x 433 x 480		
Weight (kg)	30.8	34.5	34.9
<b>Battery</b>			
Sealed Maintenance Free Lead Acid Battery	12V / 9AH x 4		
User Replaceable	Yes		
Typical Recharge Time	6 Hours		
<b>Runtimes</b>			
Half-load / Full-load (mins)	40 / 18	22 / 8	13 / 5
<b>Status Indicators</b>			
Indicators	Power On, Using Battery, AVR, Load Level, Battery Level		
Audible Alarms	On Battery, Low Battery, Overload		
Multi-function LCD Readout	Yes		
<b>Communication</b>			
PowerPanel® Business Edition	Windows 8 / 7 / Vista / XP / 2000, Server 2012 / 2008 / 2003, Linux, VMware Esxi, and Citrix XenServer		
<b>Management</b>			
Self Test	Yes		
Auto-Charge / Auto-Restart	Yes		
Connectivity Ports	USB, Serial ports (RS232, Dry connector)		
SNMP/HTTP Capable	Yes		

#All specifications are subject to change without notice. ©2013 NITRAM S.A. All Trademarks are the property of their owners.

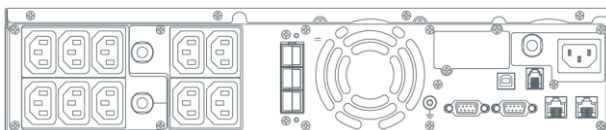

Back (ELITE PRO 1000/1500ELCDRTXL2U)

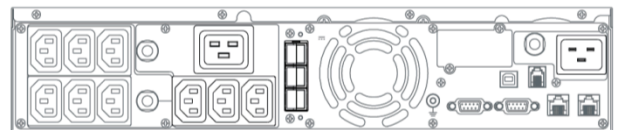

Back (ELITE PRO 2200ELCDRTXL2U)

