


ELITE PRO RT Series

ELITE PRO 3000ELCDRTXL2U

Powered by **CyberPower**

Extended Power Protection for Mission-Criticals



The ELITE PRO RT Series UPS provides advanced level of power protection to servers, telecom equipment, VOIP, internet working hardware and other mission-critical applications. Featuring Pure Sine Wave output and Automatic Voltage Regulation (AVR) stabilizes the AC signal and maintains a safe voltage, it allows the UPS to maintain safe power levels for the connected equipment without resorting to battery power. With the add-on advantage of Extended Runtime (XL) battery packs, the UPS backup time can be extended to maximize workflow flexibility. The placement-wise design could be configured in either Tower (T) or Rackmount (RM) form with the attached stands and skids to make the most of your workspace.

The optional SNMP/HTTP Remote Management Capability enables remote management and control of the system through standard web browser. Together with the included PowerPanel® Business Edition management software, it could provide corporate servers and critical workstations comprehensive network power management including unattended-shutdown, event logging, reporting, and notifications.

Applications

- Home and Home Office
- Home Theater System
- Small Office
- Medium Business
- Corporate Data Center
- Networking, Servers & Workstations
- Industrial Equipment

Energy-Saving

Pure Sine Wave

EPO Port

SNMP /HTTP


XL Model

RM/T Form

Series Features

- GreenPower UPS™ Technology
- Pure Sine Wave Output
- Line-Interactive UPS Topology
- Rack/Tower Convertible Configurations
- Automatic Voltage Regulator (AVR)
- EMI, RFI, Surge and Spike Protection
- Critical Load Outlets
- Phone/Fax/Modem/DSL/Network Protection
- Auto-Restart/Auto-Charge
- Emergency Power Off (EPO) Port
- Protected On/Off Switch
- Multifunction LCD Readout
- Rotatable LCD Indicator
- Extended Runtime (XL) Models
- USB & Serial Connectivity Ports
- Hot-Swappable Battery Packs
- User-Replaceable Batteries
- SNMP/HTTP Remote Management Capability (Optional)
- PowerPanel® Business Edition Software

OUTPUT WAVEFORM - PURE SINE WAVE



For applications which require the highest level of line clarity for proper function, the Smart App UPS Systems are the perfect choices with its quality Pure Sine Wave output. They are designed for electronic devices that have *Power Factor Correction* (PFC) Power Supplies as well as for small AC motors and other devices that need true sine-wave power in order to function properly.

POWERPANEL® BUSINESS EDITION S/W



Auto-shutdown Software

PowerPanel® Business Edition Management Software, is compatible with Windows8, 7, Vista, XP, 2000, Windows Server 2012, 2008, 2003, VMware Esxi, Citrix XenServer, Linux and Mac.


**Software functions may vary due to firmware version and/or hardware constraints.*

ELITE PRO RT Series

ELITE PRO 3000ELCDRTL2U


Powered by **CyberPower**

Technical Specification




Model	ELITE PRO3000ELCDRTL2U
Configuration	
Capacity (VA / Watts)	3000 / 2400
Energy-Saving Technology	Yes
Input	
Frequency Range	47 Hz - 63 Hz (Auto Sensing)
Input Plug Type	IEC 320 C20
Output	
UPS Outlets (Numbers)	(1) IEC320 C19 (8) IEC320 C13
On Battery Output Voltage	Pure Sinewave at 230 Vac +/- 5%
On Battery Output Frequency	50 Hz / 60 Hz +/- 0.1 Hz
Typical Transfer Time	4ms
Overload Protection	Circuit Breaker / Internal Circuitry Limiting
AVR	Buck / Boost / Double Boost
Surge Protection and Filtering	
Surge Protection	Yes
DSL / Phone / FAX / Modem Protection	RJ11 / RJ45 (One In / One Out)
Physical	
Dimensions (H x W x D) (mm)	88 x 433 x 630
Weight (kg)	42
Battery	
Sealed Maintenance Free Lead Acid Battery	12V / 9AH x 4
User Replaceable	Yes
Typical Recharge Time	6 Hours
Runtimes	
Half-load / Full-load (mins)	8 / 3
Status Indicators	
Indicators	Power On, Using Battery, AVR, Load Level, Battery Level
Audible Alarms	On Battery, Low Battery, Overload
Multi-function LCD Readout	Yes
Communication	
PowerPanel® Business Edition	Windows 8 / 7 / Vista / XP / 2000, Server 2012 / 2008 / 2003, Linux, VMware Esxi, and Citrix Xenserver
Management	
Self Test	Yes
Auto-Charge / Auto-Restart	Yes
Connectivity Ports	USB, Serial ports (RS232, Dry connector)
SNMP/HTTP Capable	Yes

#All specifications are subject to change without notice. ©2013 NITRAM S.A. All Trademarks are the property of their owners.

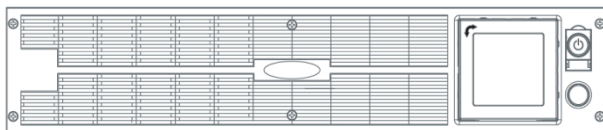

Front

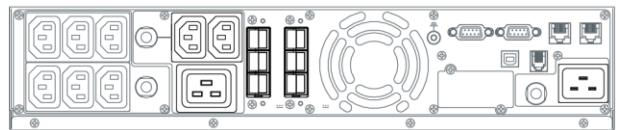

Back

