

ELITE PRO Series

ELITE PRO 750ELCD

Powered by **CyberPower**

Extended Power Protection for Mission-Criticals



The ELITE PRO Series UPS provides advanced level of power protection to servers, telecom equipment, VOIP, internet working hardware and other mission-critical applications. Featuring Pure Sinewave output and Automatic Voltage Regulation (AVR) stabilizes the AC signal and maintains a safe voltage, it allows the UPS to maintain safe power levels for the connected equipment without resorting to battery power. Its detachable, remote-controllable Multifunction LCD Readout can be mounted on the wall or in the control center nearby to provide highest convenience and flexibility under different management scenarios.

The optional SNMP/HTTP Remote Management Capability enables remote management and control of the system through standard web browser. Together with the included PowerPanel® Business Edition management software, it could provide corporate servers and critical workstations comprehensive network power management including unattended-shutdown, event logging, reporting, and notifications.



Applications

- Home and Home Office
- Home Theater System
- Small Office
- Networking, Servers & Workstations


Series Features

- GreenPower UPS™ Technology
- Pure Sine Wave Output
- Line-Interactive UPS Topology
- Automatic Voltage Regulator (AVR)
- EMI, RFI, Surge and Lightning Spike Protection
- Auto-Restart/Auto-Charge
- Emergency Power Off (EPO) Port
- Multifunction LCD Readout
- USB & Serial Connectivity Ports
- User-Replaceable Batteries
- SNMP/HTTP Remote Management Capability (Optional)
- PowerPanel® Business Edition Software

Energy-Saving	Pure Sine Wave	EPO Port
SNMP /HTTP	LCD Display	Detachable LCD

OUTPUT WAVEFORM - PURE SINE WAVE

For applications which require the highest level of line clarity for proper function, CyberPower Smart App UPS Systems are the perfect choices with its quality Pure Sine Wave output. They are designed for electronic devices that have *Power Factor Correction (PFC)* Power Supplies as well as for small AC motors and other devices that need true sine-wave power in order to function properly.

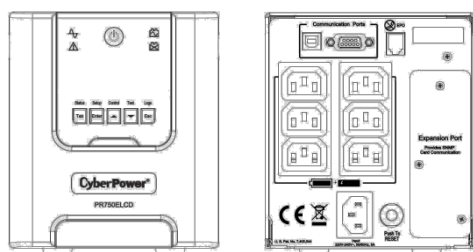

Front

Back

POWERPANEL® BUSINESS EDITION S/W

Auto-shutdown Software


PowerPanel® Business Edition Management Software, is compatible with Windows8, 7, Vista, XP, 2000, Windows Server 2012, 2008, 2003, VMware Esxi, Citrix XenServer, Linux and Mac.

**Software functions may vary due to firmware version and/or hardware constraints.*

ELITE PRO Series

ELITE PRO 750ELCD

Powered by **CyberPower**



Technical Specification

Model	ELITE PRO 750ELCD
Configuration	
Capacity (VA / Watts)	750/675
Energy-Saving Technology	Yes
Input	
Frequency Range	47 Hz - 63 Hz (Auto Sensing)
Input Plug Type	IEC 320 C14
Output	
UPS Outlets (Numbers)	(6) IEC
On Battery Output Voltage	Pure Sine Wave at 230 Vac +/- 5%
On Battery Output Frequency	50/60Hz +/- 1%
Overload Protection	Circuit Breaker / Internal Current Limiting
AVR	Double Boost, Single Buck
Surge Protection and Filtering	
Surge Protection	Yes
Physical	
Dimensions (H x W x D) (mm)	162 x 349 x 138
Weight (kg)	12.3
Battery	
Sealed Maintenance Free Lead Acid Battery	12V/7AH x 2
User Replaceable	Yes
Typical Recharge Time	8 Hours
Runtimes	
Half-load / Full-load (mins)	4/12
Status Indicators	
Indicators	Power On, Line Mode, On Battery, Fault, Replace Battery, LCD Display
Audible Alarms	Battery Discharge, Battery Low, Fault, Overload
Multi-function LCD Readout	Yes
Communication	
PowerPanel® Business Edition	Windows 8 / 7 / Vista / XP / 2000, Server 2012 / 2003 / 2008, Linux
Management	
Self Test	Yes
Auto-Charge / Auto-Restart	Yes
Connectivity Ports	USB, Serial
SNMP/HTTP Capable	Optional

#All specifications are subject to change without notice. ©2014 NITRAM S.A. All Trademarks are the property of their owners.

